


Connect Floor Model



1

GB Twist the foot anticlockwise to open the transport safetylock.
Take out the supporting rod.


S Vrid foten motsols för att öppna transportläget.
Tag loss stativet.

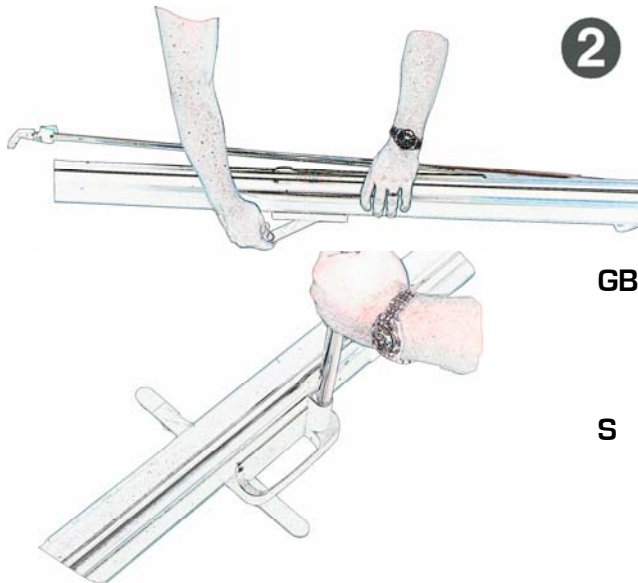

2

GB Turn the foot 90 degrees towards the case. Put the supporting rod into the handle.

S Vrid foten 90 grader mot kassetten.
Sätt i stativet i handtaget.

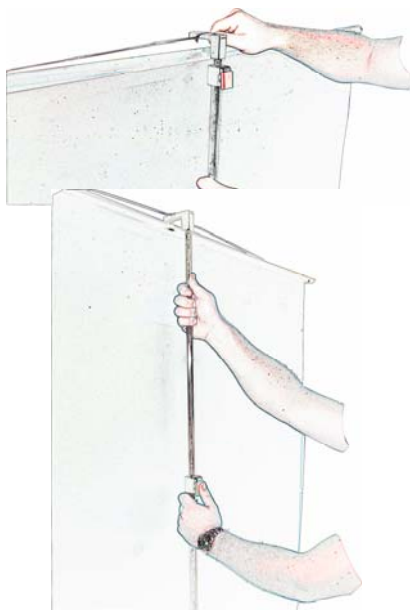

3

GB Pull the screen up to hook .
Adjust the height of the screen with the upper lock.
Keep a firm grip of the upper rod when pressing the locking device!

S Drag upp duken till kroken.
Justera dukens höjd med låset.
Håll ett stadigt grepp om det övre röret när du trycker på låsmekanismen!