


TXA-800 - Amplifier System

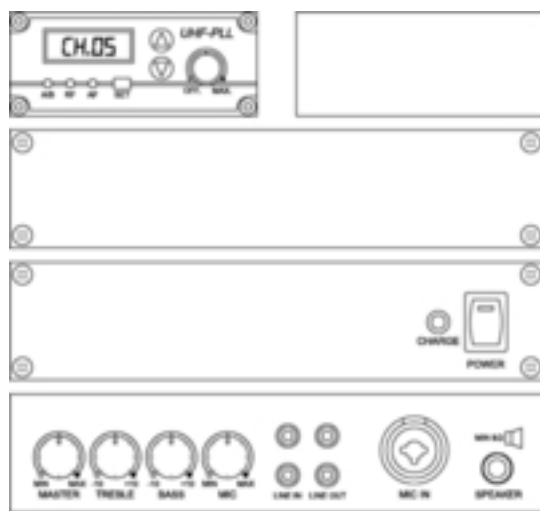

TXA-800

Portable amplifier system, with integrated, adjustable multifrequency receiver unit in UHF PLL technology.

- Operation via mains connection or built-in rechargeable lead gel battery 2 x 12 V/3 Ah (operating time: up to 4 hours), integrated automatic battery charging, discharge protection
- For mobile applications, e.g. at sales events, lectures
- 16 selectable UHF frequencies (863.1-864.9 MHz) with diversity system
- 2-way speaker system of high power capability
- 1 adjustable microphone input via comb. jack (XLR/6.3 mm), 1 stereo line input (RCA), common master control and 2-way tone control
- 1 stereo line output (RCA)
- 6.3 mm jack connection (8 Ohm) for external speaker
- Stand sleeve



Licence-free in the EU.

TXA-800:

- Amplifier system with 1 wireless receiver

TXA-800CD:

- Amplifier system with 1 wireless receiver
- CD player with anti-shock system, MP3 reproduction and slot-in mechanism
- SD card reader, USB interface
- Pitch control function
- Supplied with remote control for the CD player

TXA-802CD:

- Amplifier system with 2 wireless receivers
- CD player with anti-shock system, MP3 reproduction and slot-in mechanism
- SD card reader, USB interface
- Pitch control function
- 1 wireless transmitter for the wireless audio link operation of several TXA-800 systems
- Supplied with remote control for the CD player

Matching microphone transmitters or pocket transmitters are available at option, e.g. TXA-800HSE, TXA-800HT or ATS-12HT, ATS-162T.

Technical data

Output power	: 80 W _{MAX} /50 W _{RMS}
Frequency range	: 70-16,000 Hz
Carrier frequency	: 863.1-864.9 MHz
Operating range	: approx. 30 m
Sensitivities	:
Mic inputs	: 6 mV
Line inputs	: 800 mV
Link	: optional (TXA-802MT)
Equalizer, bass	: ±15 dB/100 Hz
Equalizer, midrange	: -
Equalizer, treble	: ±10 dB/10 kHz
Power supply	: 230 V~/50 Hz/150 VA, rech. battery: 2 x 12 V/3 Ah
Admiss. ambient temp.	: 0-40 °C
Dimensions	: 300x470x230 mm
Weight	: 11.2 kg