



euroscreen® Control Box

The Euroscreen® Control Box is a multifunctional box that features RF, IR, Dry Contact/Contact Closure, RS232 and "12V" trigger control options. Euroscreen® offers suitable transmitters and matching cables to utilize all basic control options of the box.

ADDITIONAL CONTROL OPTIONS



Switch
Box is equipped with UP/STOP/DOWN buttons.



IR Remote
Handheld infrared remote control with UP/STOP/DOWN buttons.



RF Remote
Handheld radio remote control with UP/STOP/DOWN buttons.



AutoLink
Radio controlled autolink connected to the projector power supply. When power goes on the screen goes down. When power goes off the screen goes up.



12V Trigger
Connect the box to the projector "12V" trigger output. Operating range 5 - 35V. 2,5mm Audio plug.



RS232
Control the box with RS232-signals through the RJ11-port, pins 1 & 6.




Contact Closure
Control the box with contact closure through the RJ11-port, pins 2 - 5.
2: Down
3: Stop
4: Up
5: Neutral




IR Eye
Connects to the box by a 3,5mm Audio plug. Enables the box to be hid away.

CASE DIMENSIONS

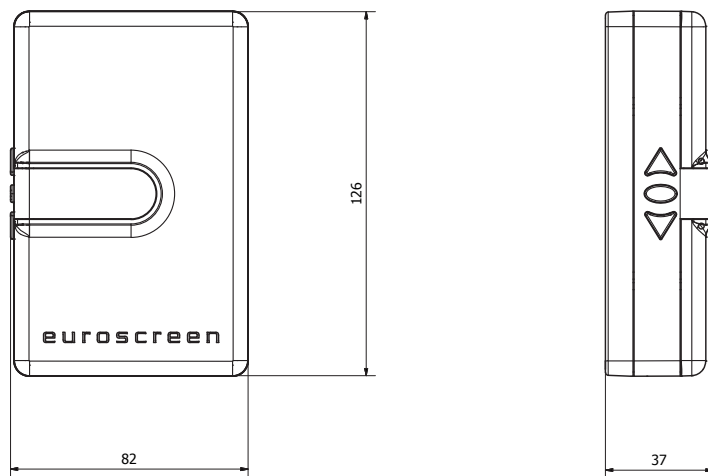

INTERIOR OVERVIEW

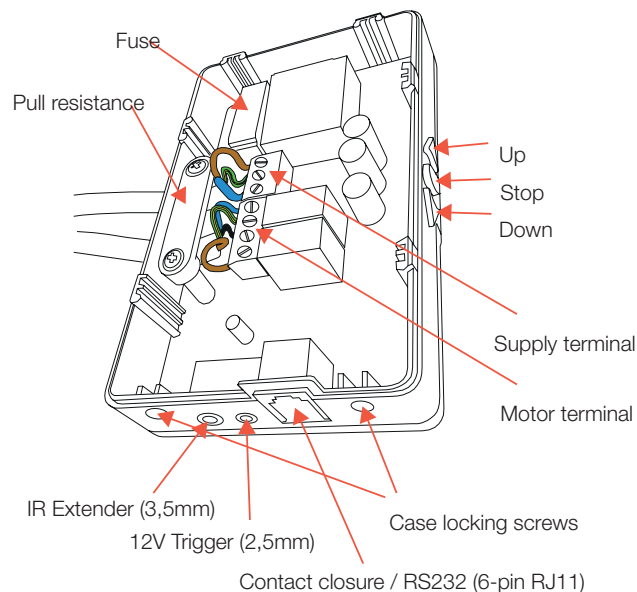

euroscreen® Control Box

ELECTRICAL SPECIFICATIONS

Specifications

Input: 230VAC / 50Hz

Output: $\leq 4A$

Radio signal frequency: 433,92MHz

The box is grounded.

Fuse: T5L250V

Cable Specifications

Thickness: $\varnothing 7$ mm

Cable dims: $4 \times 0,5 \text{mm}^2$, L: 1500mm, motor to control

$3 \times 0,75 \text{mm}^2$, L: 3000mm, control to plug


Wires: Black - Up

Brown - Down

Blue - Neutral

Green/Yellow - Ground

PACKAGING DIMENSIONS

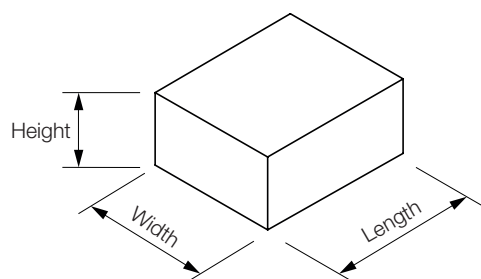

Box length	Box width	Box height
223	185	105