

euroscreen® Sesame 2.1 Tab Tension

SCREEN SURFACES



FlexWhite

Pliable matt white front surface, superb colour rendition, Full HD compliant. Gain 1.0.



ReAct II

Pliable silver grey front surface, enhances colour contrast in bright light, Full HD compliant. Peak gain 1.1



FlexRear

Neutral grey rear projection surface. Only available without borders. Gain 2.5.


PROJECTION FORMATS



Available in sizes without black borders.



The screen has 5 cm wide black borders. The format of the viewing area is 4:3.



The screen has 5 cm wide black borders. The format of the viewing area is 16:10.



The screen has 5 cm wide black borders. The format of the viewing area is 16:9.

CONTROL OPTIONS




Installation

5m cable. Needs to be installed by electrician.

The Sesame 2.1 is an award winning case with an innovative recessed ceiling design for installation within a ceiling void, suitable for installation in suspended or plastered ceilings. The Tab Tension function provides a perfect lay flat viewing surface, ideal for short throw projectors. Adjustable inner brackets allow for fine-tune of bottom dowel for perfectly flush closure when retracted up into case. The white aluminium case itself has a stylish appearance and unique removable integrated external flange profiles for easy and quick service access. The case also features a concealed drop function of the complete screen section which enable for easy access to install case first and screen later. Brackets especially designed for Sesame 2.1 provides a trouble-free installation of the case in a prepared ceiling cut-out up to a 100 mm ceiling void. If black borders are chosen, a 30cm black drop is standard. Motor is by default on the viewers right side.

SCREEN DIMENSIONS

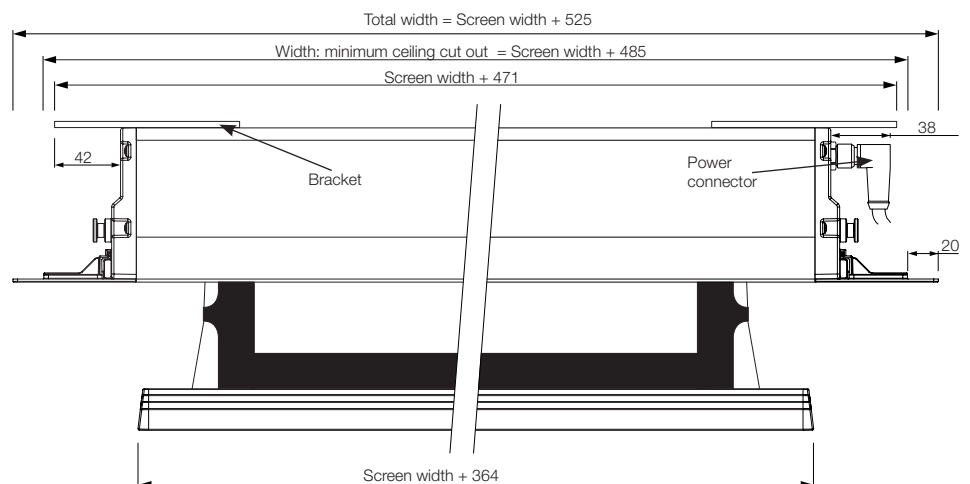


Considerations regarding cut out width

Minimum cut out width: screen width + 485

Maximum cut out width: screen width + 523

Recommended cut out width: screen width + 505

CASE DIMENSIONS

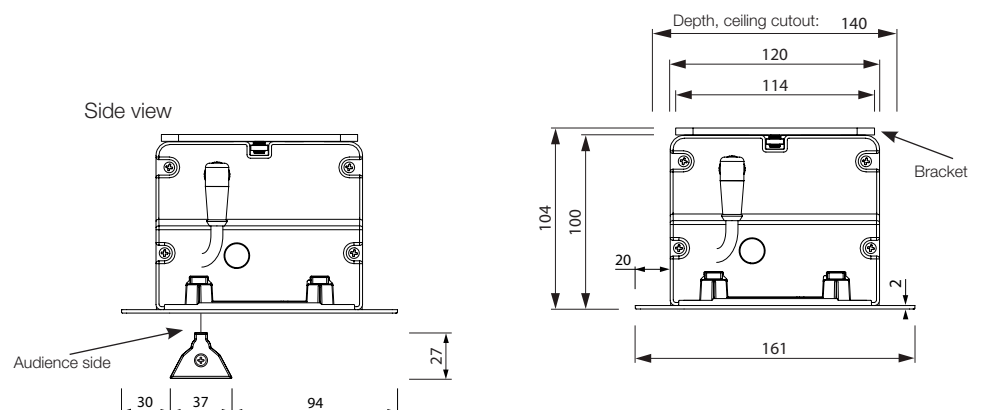

ELECTRICAL SPECIFICATIONS

Cable Specifications

Thickness: \varnothing 7 mm
 Cable area: 4x0,5mm² , motor to control
 3x0,75mm² , control to plug
 Wires: Black - Up
 Brown - Down
 Blue - Neutral
 Green/Yellow - Ground


Installation cable

Part no: 210673
 Enclosed with the screen.
 Weight: 0.40kg

Motor Specifications




Voltage: 220 V Frequency: 50 Hz
 Power: 121 W Momentum: 6Nm
 Speed: 28 rpm Protection: IP44

The motor is grounded.

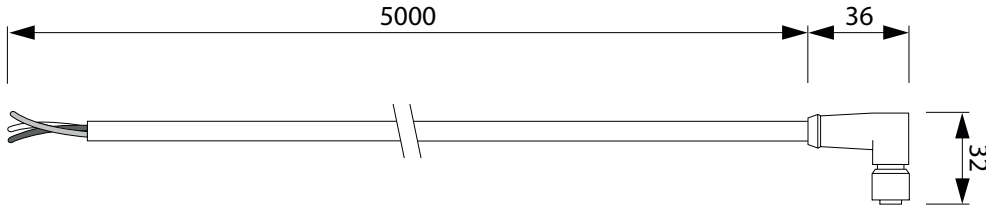


BRACKET DIMENSIONS

Brackets are included in all Sesame products

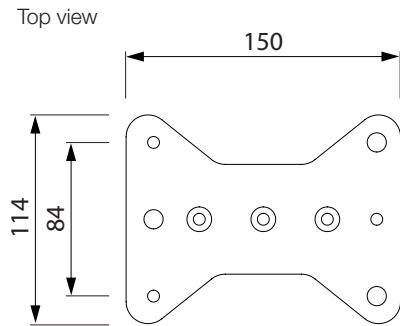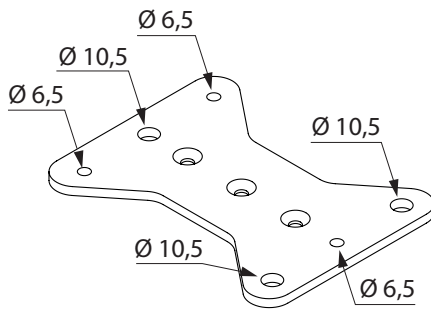

PACKAGING DIMENSIONS

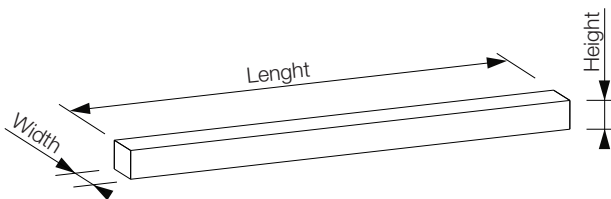

Screen width	Box length	Box width	Box height
1600	2200	245	250
1800	2400	245	250
2000	2600	245	250
2200	2800	245	250
2400	3000	245	250
2700	3300	245	250
3000	3600	245	250